




NTN BEARINGS(UK)LTD.

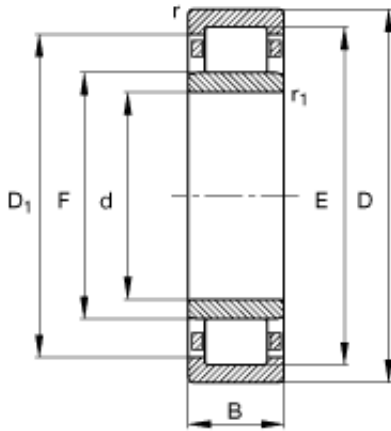

95 mm x 170 mm x 43 mm FAG NU2219-E-TVP2 Rodamientos de rodillos cilíndricos

Bearing No. NU2219-E-TVP2

NU2219-E-TVP2 Bearing 2D drawings and 3D CAD models

| | |
|---------------------|--|
| Size | 95x170x43 mm |
| Bore Diameter | 95 mm |
| Outer Diameter | 170 mm |
| Width | 43 mm |
| d | 95 mm |
| D | 170 mm |
| B | 43 mm |
| D ₁ | 148,6 mm |
| D _{a max} | 158 mm |
| d _{a max} | 111 mm |
| d _{a min} | 107 mm |
| d _{b min} | 116 mm |
| E | 154,5 mm |
| F | 112,5 mm |
| r _{1 min} | 2,1 mm |
| r _{a max} | 2,1 mm |
| r _{a1 max} | 2,1 mm |
| r _{min} | 2,1 mm |
| s | 2,2 mm / Axial displacement facility from central position |
| m | 3,9 kg / Weight |
| C _r | 340000 N / Dynamic load rating (radial) |
| C _{0r} | 370000 N / Static load rating |



NTN BEARINGS(UK)LTD.

| | |
|----------|---|
| | (radial) |
| n_G | 4850 1/min / Limiting speed |
| n_B | 3100 1/min |
| C_{ur} | 64000 N / Fatigue limit load, radial |