




## NTN BEARINGS(UK)LTD.

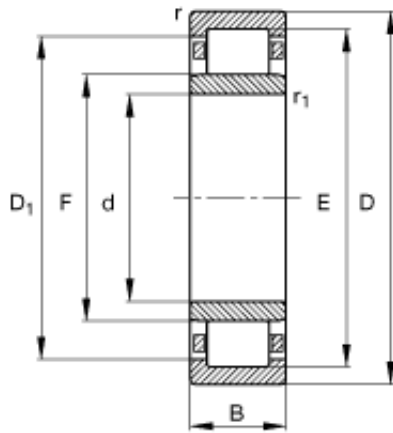

NU2220-E-TVP2 Bearing 2D drawings and 3D CAD models

### 100 mm x 180 mm x 46 mm FAG NU2220-E-TVP2 Rodamientos de rodillos cilíndricos

Bearing No. NU2220-E-TVP2

Size	100x180x46 mm
Bore Diameter	100 mm
Outer Diameter	180 mm
Width	46 mm
d	100 mm
D	180 mm
B	46 mm
D <sub>1</sub>	156,9 mm
D <sub>a max</sub>	168 mm
d <sub>a max</sub>	117 mm
d <sub>a min</sub>	112 mm
d <sub>b min</sub>	122 mm
E	163 mm
F	119 mm
r <sub>1 min</sub>	2,1 mm
r <sub>a max</sub>	2,1 mm
r <sub>a1 max</sub>	2,1 mm
r <sub>min</sub>	2,1 mm
s	2,5 mm / Axial displacement facility from central position
m	4,77 kg / Weight
C <sub>r</sub>	395000 N / Dynamic load rating (radial)
C <sub>0r</sub>	445000 N / Static load rating



## NTN BEARINGS(UK)LTD.

	(radial)
$n_G$	4550 1/min / Limiting speed
$n_B$	2900 1/min
$C_{ur}$	77000 N / Fatigue limit load, radial