




# NTN BEARINGS(UK)LTD.

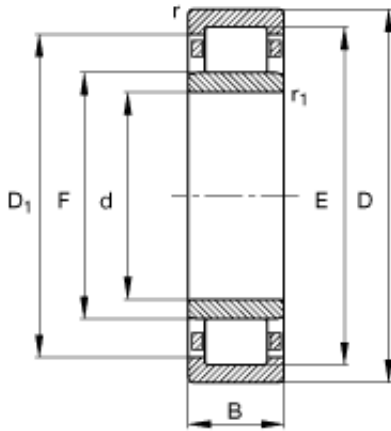

## 60 mm x 110 mm x 28 mm FAG NU2212-E-TVP2 Rodamientos de rodillos cilíndricos

Bearing No. NU2212-E-TVP2

NU2212-E-TVP2 Bearing 2D drawings and 3D CAD models

Size	60x110x28 mm
Bore Diameter	60 mm
Outer Diameter	110 mm
Width	28 mm
d	60 mm
D	110 mm
B	28 mm
D <sub>1</sub>	96,1 mm
D <sub>a max</sub>	101 mm
d <sub>a max</sub>	71 mm
d <sub>a min</sub>	69 mm
d <sub>b min</sub>	75 mm
E	100 mm
F	72 mm
r <sub>1 min</sub>	1,5 mm
r <sub>a max</sub>	1,5 mm
r <sub>a1 max</sub>	1,5 mm
r <sub>min</sub>	1,5 mm
s	1,6 mm / Axial displacement facility from central position
m	1,08 kg / Weight
C <sub>r</sub>	152000 N / Dynamic load rating (radial)
C <sub>0r</sub>	153000 N / Static load rating



## NTN BEARINGS(UK)LTD.

	(radial)
$n_G$	7700 1/min / Limiting speed
$n_B$	4400 1/min
$C_{ur}$	27500 N / Fatigue limit load, radial