




# NTN BEARINGS(UK)LTD.

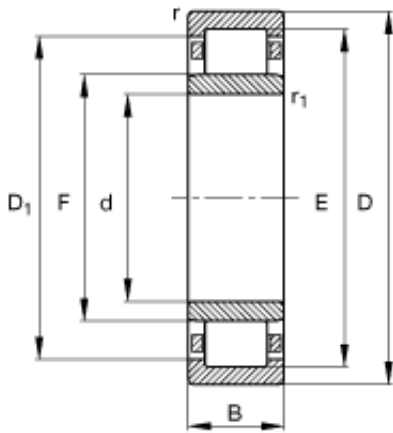

## 70 mm x 125 mm x 31 mm FAG NU2214-E-TVP2 Rodamientos de rodillos cilíndricos

Bearing No. NU2214-E-TVP2

NU2214-E-TVP2 Bearing 2D drawings and 3D CAD models

Size	70x125x31 mm
Bore Diameter	70 mm
Outer Diameter	125 mm
Width	31 mm
d	70 mm
D	125 mm
B	31 mm
D <sub>1</sub>	109,4 mm
D <sub>a max</sub>	116 mm
d <sub>a max</sub>	82 mm
d <sub>a min</sub>	79 mm
d <sub>b min</sub>	86 mm
E	113,5 mm
F	83,5 mm
r <sub>1 min</sub>	1,5 mm
r <sub>a max</sub>	1,5 mm
r <sub>a1 max</sub>	1,5 mm
r <sub>min</sub>	1,5 mm
s	1,6 mm / Axial displacement facility from central position
m	1,52 kg / Weight
C <sub>r</sub>	185000 N / Dynamic load rating (radial)
C <sub>0r</sub>	195000 N / Static load rating



## NTN BEARINGS(UK)LTD.

	(radial)
$n_G$	6800 1/min / Limiting speed
$n_B$	3900 1/min
$C_{ur}$	35500 N / Fatigue limit load, radial